


## Optical Spectrum Analyzer

### OSA-APx Series

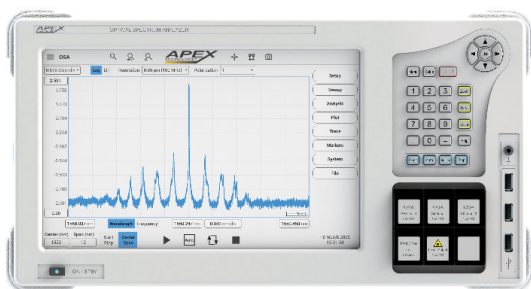

#### High Resolution OSA

500x better resolution than a grating-based OSA  
Accurately measure the smallest spectral features

Combines:

- Optical Spectrum Analyzer
- Wavemeter
- Polarimeter
- Component Analyzer

## Optical Complex Spectrum Analyzer


### OCSA-APx Series

#### High Resolution OSA + High Bandwidth Optical Modulation Analyzer

All the benefits of the OSA-APx Series plus accurate phase measurements with no symbol rate limitation.

Combines:


- Optical Complex Spectrum Analyzer
- Modulation Analyzer
- Wavemeter
- Polarimeter
- Component Analyzer

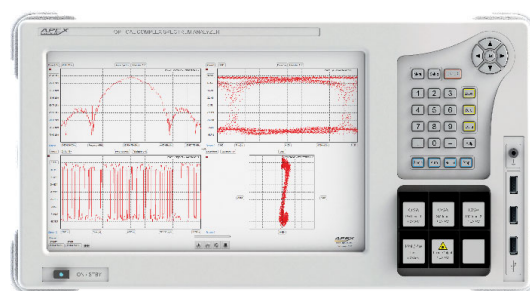

## OSA/OCSA Advantages


Advantages	Benefits	Features
High Resolution	Most precise analysis of optical signals	> 380x more resolution than <u>best</u> grating-based OSA
High Dynamic Range	Detect and distinguish close-in optical signals	Quasi-rectangular resolution filters 800x better close-in dynamic range than <u>best</u> grating-based OSA
High Wavelength Accuracy	Reliable measurements	Three (3) internal references
Ease of Use	Time-saving	User-friendly interface & Remote control capabilities
Versatility	Cost-effective multi-analysis tool	High-resolution Spectrum Analyzer + Up to 4 tunable laser sources + Polarization & Component Analysis + Phase Analysis (OCSA)

### Ultra-high Optical Bandwidth Resolution

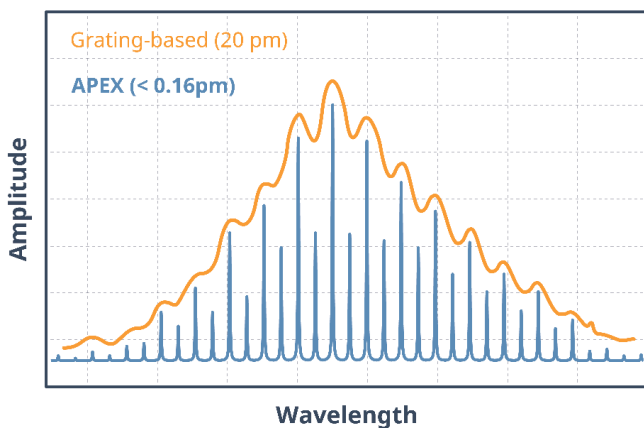


Hundreds of times better resolution than grating-based/monochromator OSA allows to accurately measure the smallest features.

### High Close-in Dynamic Range

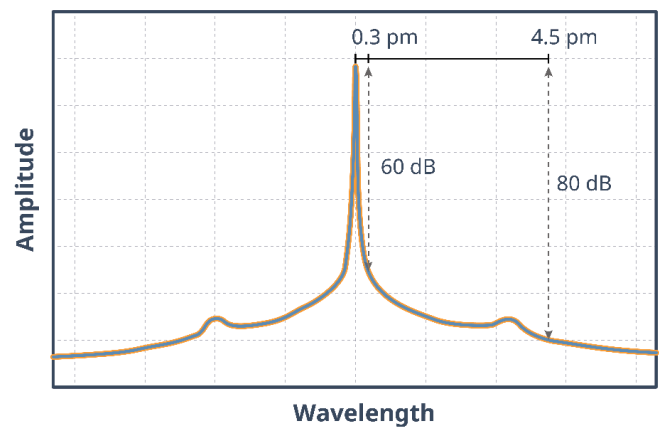


A 83 dB dynamic range to retrieve the weakest optical signals among strong spectral features.

### Two Orthogonal Polarization Channels

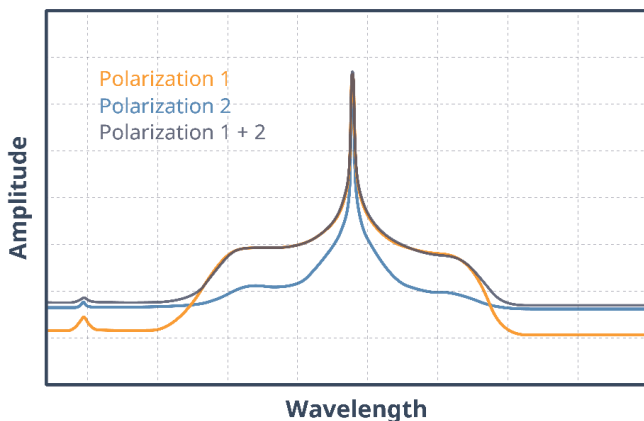


Two polarization channels displayed separately and simultaneously, or combined for polarization independent measurements.

### High Wavelength Accuracy

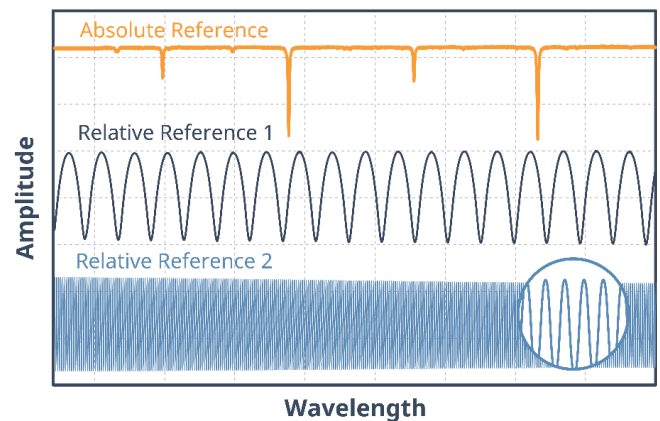


Absolute accuracy of the tunable laser source, maintained using three (3) distinct wavelength references, also allowing the analyzer to be used as a wavelength meter.

## Tunable Laser Sources Wavelength Ranges

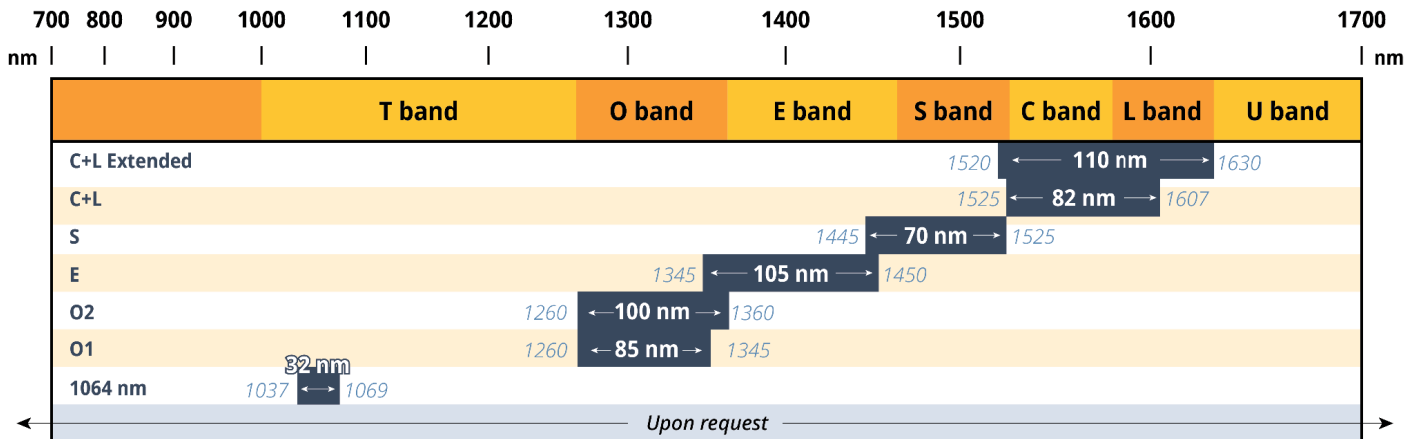


## Tunable Laser Source(s) & Tracking Generator

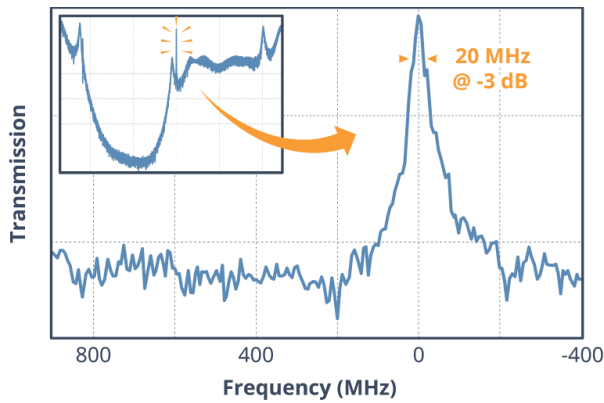


Built-in or external tunable laser with narrow linewidth wide mode-hop-free tuning range lasers, along with the tracking generator option, enable both reflection and transmission analysis of components, with up to 1 MHz resolution and 63 dB of dynamic range.

## Polarization Analysis

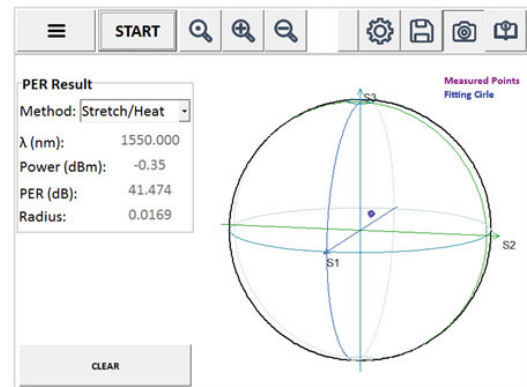

SOP, DOP, and PER measured with high accuracy and allowing fast sampling rates, over a wide range of input optical power. Information displayed as Jones vectors, Poincare sphere, and Stokes parameters.

## Complex Phase Analysis from Time Domain Measurements

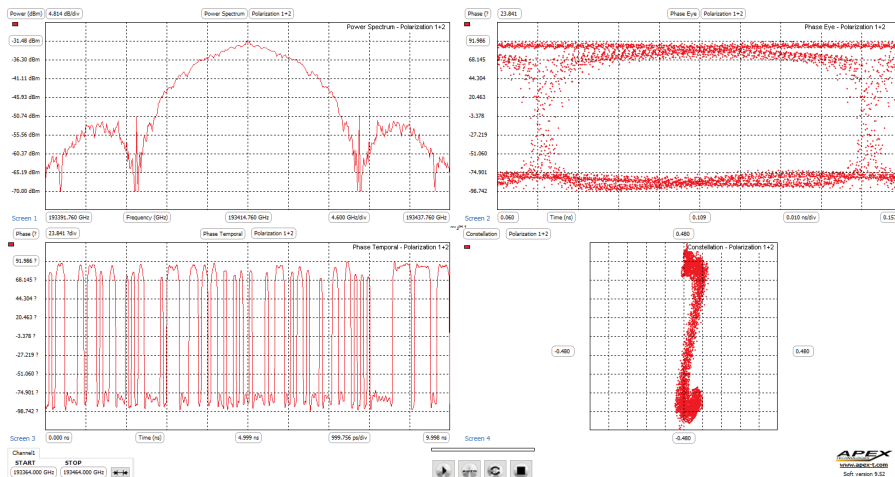

Available phase-related analysis:

- Intensity and Phase vs Frequency
- Intensity, Phase, Alpha Parameter, and Chirp vs Time
- Eye Diagram, Constellation
- Group Delay and Chromatic Dispersion
- Complex transfer function of components

## OSA/OCSA Common Specifications

OSA-AP1				OSA-AP5		OSA-AP6	
Laser Sources <i>Bands</i>	DFB <i>C   L   C+L</i>		TLS <i>±1064 nm</i>		TLS <i>O   E   S   C+L   C+L Ext.</i>		
Wavelength Resolution <i>@ 3 dB</i>	20 MHz 140 MHz	0.16 pm 1.12 pm	5 MHz 20 MHz 100 MHz 140 MHz	0.02 pm 0.08 pm 0.38 pm 0.53 pm	5 MHz 20 MHz 100 MHz 140 MHz	0.04 pm 0.16 pm 0.80 pm 1.12 pm	
Absolute Wavelength Accuracy	± 2 pm Typical (± 3 pm Max)						
Wavelength Repeatability	< 0.5 pm <sup>1</sup>						
Dynamic Range	86 dB <sup>2</sup>		89 dB <sup>3</sup>		87 dB <sup>3</sup>		
Close-in Dynamic Range	> 40 dB @ ± 1.3 pm > 60 dB @ ± 8 pm > 80 dB @ ± 30 pm		> 40 dB @ ± 0.1 pm > 60 dB @ ± 0.4 pm > 80 dB @ ± 6 pm				
Spurious-free Dynamic Range	55 dB Typical (50 dB min)						
Power Level Range	-76 dBm to +10 dBm		-79 dBm to +10 dBm		-77 dBm to +10 dBm		
Absolute Power Level Accuracy <sup>4</sup>	± 0.3 dB						
Power Level Repeatability <sup>5</sup>	< ± 0.1 dB						
Sweep Rate	1.2 nm/s		Up to 20 nm/s <sup>6</sup>				
Optical Input Connectors	FC/PC for SM fiber <i>(other connectors under request)</i>						
Dimensions (W x H x D)	365 x 242 x 380.1 mm 14.37 x 9.57 x 14.96 in		450 x 250 x 485 mm 17.7 x 9.9 x 19.1 in				
Weight	18 kg (40 lbs)		18 – 23 kg (40 – 51 lbs) <i>(depending on options)</i>				
I/O Connectors	Ethernet, GPIB, Electrical trigger input, USB x5, VGA						
Power	115-230 VAC, 50/60 Hz   350 W						
Environmental Conditions	Operating Temp.: +5 to +35°C   Storage Temp.: -10 to +50°C Humidity: 20 – 80% RH (non-condensing)						

(1) Standard deviation over 20 measurements.

(2) Measured at 20 MHz resolution.


(3) 4 dB less for 2-laser configurations; 8 dB less for 3 & 4-laser configurations.

(4) Typical value @1310 or 1550 nm, with 0 dBm. Monochromatic input signal and resolutions above 5 MHz.

(5) Monochromatic input signal ; standard deviation over 20 measurements. Resolutions above 5 MHz.

(6) Filter resolution 100 MHz.

## OCSA Specifications

OCSA-AP5/AP6	
Optical Bandwidth	3 THz
Clock Power	> -17 dBm
Repetition Rate	From 70 MHz to 900 MHz <i>No upper limitation if modulation applied</i> <sup>1</sup> 
Maximum Temporal Resolution	325 fs
Measurement Rate	6 nm/s (750 GHz/s)

(1) For faster repetition rates, add external modulation between 70-900 MHz or PPG/AWG with patterns with sufficient length to reduce rate within range (example for 100 GBaud: any pattern between 100 and 1428 bits, including PRBS7/8/9/10.)

## OSA/OCSA Options




Options	Parameters	OSA-AP1	OSA-AP5/AP6
<b>Continuous &amp; Step-by-step Optical Tunable Laser Source Output</b> <i>(OSA-APX-1 / OCSA-APX-1)</i>	Output Power	C band: -3 dBm L band: -4 dBm C+L band: -6 dBm (C) -7 dBm (L)	-4 dBm (1 laser) -7 dBm (2/3 lasers) -11 dBm (4 lasers)
	Spectrum Linewidth	500 kHz typical (Gaussian)	< 133 kHz (Gaussian) < 10 kHz (Lorentzian)
	Side-mode Suppression Ratio (SMSR)	> 50 dBc	> 55 dB / 0.8 pm
	Relative Intensity Noise (RIN)	-158 dB/Hz	
	Wavelength Stability	1 pm @ 15 min. 2 pm @ 1 hour	±1 pm @ 1 hour
	Power Stability	0.07 dB @ 15 min. / 0.09 dB @ 1 hour	
	Fiber + Connector Type	PM + FC/APC	
	Sweep speed	Adjustable from 5 to 200 nm/s	
<b>Optical Tracking Generator Output for Transmission Measurements</b> <i>(SM: OSA-APX-2-1 / PM OCSA-APX-2-2)</i>	Dynamic Range	55 dB	60 dB
	Resolution	1 MHz	
	Output Type	Choose either SM or PM outputs	
<b>Three (3) Optical Inputs</b> <i>(OSA-APX-3 / OCSA-APX-3)</i>	Input Connectors	FC/PC (default) <sup>1</sup> for SM fiber input x1 FC/APC for PM fiber inputs x2	
<b>Integrated Polarimeter</b> <i>(OSA-APX-4 / OCSA-APX-4)</i>	Wavelength Range	1260 to 1610 nm	
	Input Power Range	-60 to +10 dBm	
	Max Sampling Rate	4 KS/s	
	SOP Accuracy	± 0.25° (-30 to +2 dBm) < 2° (-60 to +10 dBm)	
	Display modes	Full Poincaré sphere, Jones graph, Stokes Oscilloscope	
	Azimuth Accuracy	± 0.25° (-30 to +2 dBm)	
	Ellipticity Accuracy	± 0.25° (-30 to +2 dBm)	
	DOP Accuracy	± 1% (-35 to +5 dBm)	
	Relative Power Accuracy	± 0.2% (-35 to +5 dBm)	
	Absolute Power Accuracy	± 0.1% (-35 to +5 dBm)	
<b>Remote Control by GPIB</b> <i>(OSA-APX-5 / OCSA-APX-5)</i>	Ports	+ GPIB <i>(Ethernet always included)</i>	
<b>TLS C+L Extended Upgrade</b> <i>(OSA-APX-6 / OCSA-APX-6)</i>	Wavelength Range	N/A	1520 to 1630 nm
<b>External Benchtop TLS LO<sup>2</sup></b> <i>(OSA-APX-7 / OCSA-APX-7)</i>	Peak Output Power	N/A	10 – 13 dBm
	Max Power Full Span	N/A	7 – 9 dBm
<b>Group Delay &amp; Chromatic Dispersion Analysis</b> <i>(OCSA-APX-8)</i>	Enable measurement of phase, group delay and chromatic dispersion of a component, using an external reference signal <i>(Only applicable to OCSA-AP5 and OCSA-AP6)</i>		
<b>Additional Filters / Optical Bandwidth Resolutions</b> <i>(OSA-AP1-X)</i>	5 MHz (0.04 pm) and 100 MHz (0.8 pm)		N/A <i>(all filters included by default)</i>

(1) FC/APC and other connectors available upon request.

(2) Refer to TLS datasheet for details

# Bring your Lab to the Top

## APEX Technologies – Experts in Next Generation Test Equipment

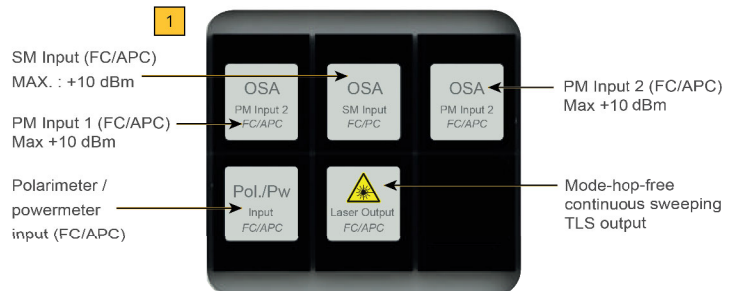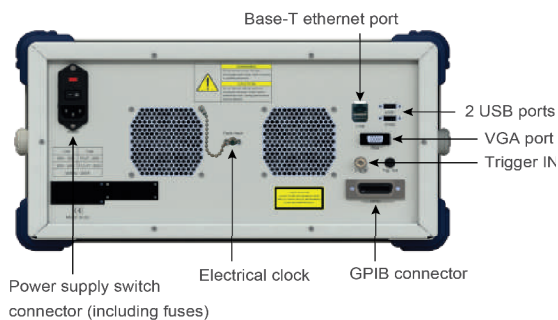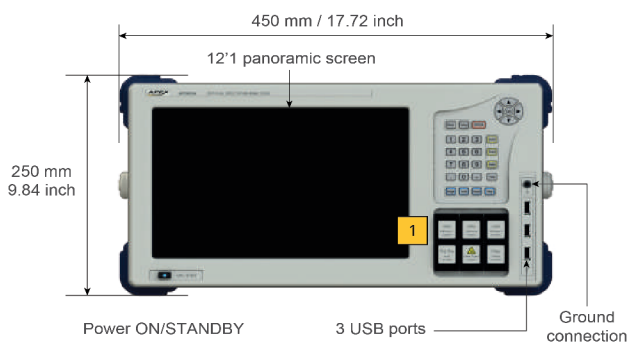

### APEX Technologies

9bis, rue ANGIBOUST  
91460 MARCOUSSIS  
FRANCE  
+33 (0)1 69 63 26 30

[www.apex-t.com](http://www.apex-t.com)



**APEX**  
TECHNOLOGIES

© 2025 APEX Technologies, All rights reserved.